


Specifications

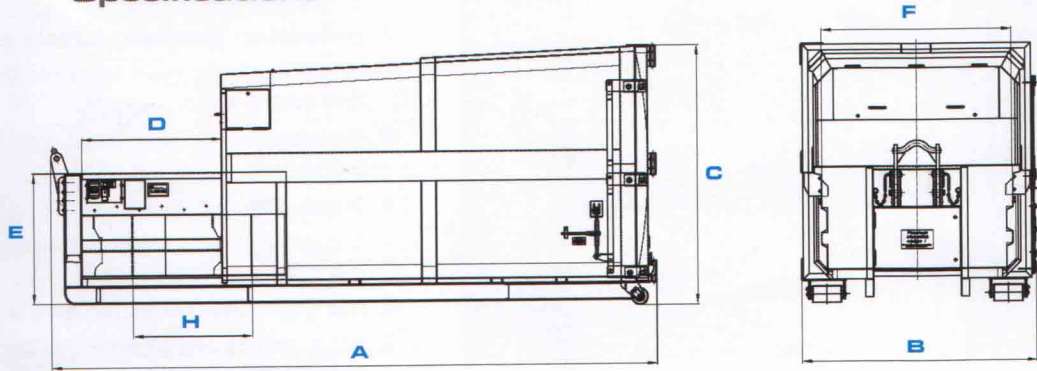

Lifting system		Skip unit				Roll on/off unit				Roll on/off unit			
Type		MPC8-A	MPC10-A	MPC12-A	MPC16-K	MPC18-K	MPC20-K	MPC25-K	MPC16-L	MPC18-L	MPC20-L	MPC23-L	
Container volume	[m ³]	8	10	12	16	18	20	25	16	18	20	23	
Hopper volume	[m ³]	1,52	1,52	1,52	1,91	1,91	1,91	1,91	3,19	3,19	3,19	3,19	
Capacity/stroke	[m ³]	1,1	1,1	1,1	1,38	1,38	1,38	1,38	2,23	2,23	2,23	2,23	
Min. theoretical cycle time	[sec]	22	22	22	30	30	30	30	50	50	50	50	
Max. theoretical through put	[m ³ /h]	179	179	179	167	167	167	167	164	164	164	164	
Compaction force	[kN]	230	230	230	330	330	330	330	330	330	330	330	
Overall length	A [mm]	3970	4520	5170	5370	5770	6220	7220	6260	6660	7110	7860	
Overall width	B [mm]	1990	1990	1990	2420	2420	2420	2420	2420	2420	2420	2420	
Overall height	C [mm]	2360	2360	2360	2650	2650	2650	2650	2650	2650	2650	2650	
Hopper length	D [mm]	1440	1440	1440	1440	1440	1440	1440	2330	2330	2330	2330	
Loading height	E [mm]	1300	1300	1300	1340	1340	1340	1340	1340	1340	1340	1340	
Hopper width	F [mm]	1630	1630	1630	1948	1948	1948	1948	1948	1948	1948	1948	
Ram stroke	H [mm]	1230	1230	1230	1230	1230	1230	1230	1980	1980	1980	1980	
Weight	[kg]	3190	3340	3560	4070	4190	4320	4650	4580	4700	4830	5080	
Maximum total weight	[kg]	12000	12000	12000	15000	15000	15000	15000	15000	15000	15000	15000	
Electric supply		Motor 5,5 kW / 400V, 50Hz-standard plug CEE-Form 16A, 5-pole											